

EL70DS-LN/LW | PATHWAY & AREA LIGHTING


Long Range Narrow/Wide Beam Illumination



The ElevateLux EL70DS-Ln/Lw is specialized for long-range, focused pathway and area illumination. It features **single-sided illumination** with a choice of optics: **Narrow Beam (Ln)** for high-precision, long-throw lighting, or **Wide Beam (Lw)** for broader distribution. This allows designers to create crisp, defined light lines. It rises to one of three heights (6"/12"/24") for use, then maintains an unobstructed landscape during the day by retracting flush with the ground. With multiple beam angles and **4 brightness levels**, control is precise. Its superior construction—extruded aluminum, stainless steel top, and a **two-layer finish of Anodizing and a weather-resistant powder coat**—guarantees durability for any demanding project. The EL70DS-Ln/Lw is a reliable, high-performance tool for focused lighting needs.

Key Features:

- **Innovative Retractable Design:** Retracts into the ground when not in use.
- **Focused Illumination:** Offers Long Range Narrow/Wide Beam Illumination.
- **Ultimate Durability:** Anodizing & weather-resistant powder coat finish.
- **Single-sided Output:** Designed with Single-sided Illumination.
- **Precision Control:** Features 4 adjustable brightness levels

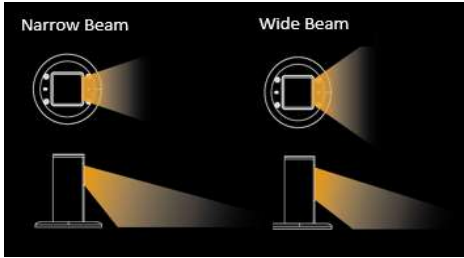

Product Specifications:

Model	EL70DS-LN/LW
Application	Pathway Lighting, Area Lighting
Illumination options	Single-sided Illumination
Raised Height	6"/12"/24"
Dimensions	2.8"x2.8"
Wattage Options	2.5W
Input Voltage	AC10-18V
Control	4 brightness levels available for adjustment
Beam Angle Options	30°, 30°x60°, 60°, 90°
CCT Options	2700K / 3000K / 4000K / 5000K <i>*The light consumes a maximum of 12W while rising</i>
Material	Extruded aluminum housing , Stainless steel top
Lens	Tempered glass
Waterproof Rating	IP67
Impact Rating	IK10
UL Certification	Pending



Artled Technology Corp.
TEL: +886 2 82005588 | FAX: +886 2 82005599
3F-2, No.611, Sec.1, Wanshou Rd., Guishan Dist., Taoyuan City 33350, Taiwan